


NEW GENERATION!!!!!!



PRODUCT DATA SHEET

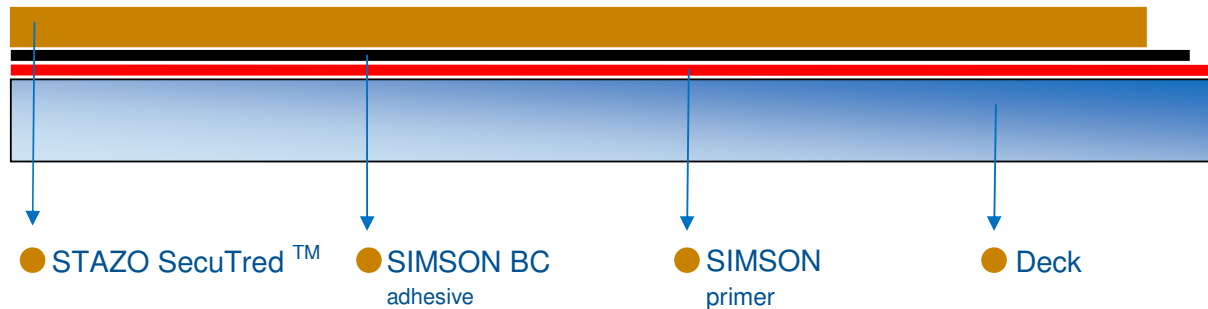

Highly compressed composite cork sheet for all wet- and outdoor applications.

E-modulus	± 110 N/mm ²
Compression strength	± 12 N/mm ²
Tensile strength	± 5 N/mm ²
Elongation at braking point	± 10%
Shore hardness	± 40 shore D
Coefficient of linear expansion	1,3x10 ⁻⁵ /m-K
Specific gravity	± 0,5
Coefficient of thermal conductivity	0,057 W/m.K
Hydrolysis resistance	excellent
Wear resistance to Taber 1000 rotations	0,0386 g CS 17;1000g
Water absorption	less than 5% at 20° C
Impact sound insulation to ISO 717/2	8 dB
Weight at 2½ mm (1/10")	1,25 kg/m ²
Non-skid in wet and dry condition	wet: 81 kg at an angle of 41° dry: 81 kg at an angle of 42°
Standard size	1880 x 500 x 2,5 mm (74"x20"x1/10")
Specific information	flame extinguishing and non flame supporting.

The comfortable non-skid

STAZO marine equipment b.v.

www.stazo.com